




SiSiB[®] OF6050 FLUID

- 1 -

CHEMICAL NAME

Silanol terminated vinylmethylsiloxane-dimethylsiloxane copolymer

CHEMICAL STRUCTURE

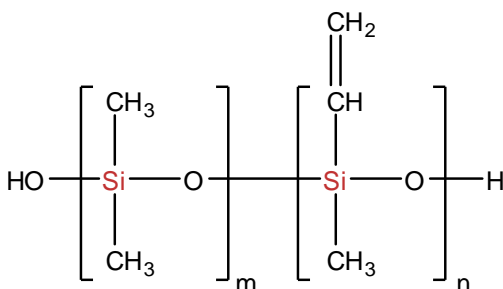

INTRODUCTION

SiSiB[®] OF6050 is a low viscosity hydroxyl terminated methyl vinyl silicone fluid.

TYPICAL PHYSICAL PROPERTIES

CAS No.	67923-19-7
Color and Appearance	Colorless clear liquid
Active Ingredient	100%
Density _{25°C}	0.98
Viscosity _{25°C}	<30 cSt
OH Content, weight	3.9~4.1%
Vinyl Content, weight	3.9~4.8%
Water Content	<0.5%

APPLICATIONS

Low viscosity silanol fluids are employed as filler treatments and structure control additives in silicone rubber compounding.

Power Chemical
ISO9001 ISO14001 certified

Copyright© 2008 Power Chemical Corporation Ltd.
SiSiB[®] is a registered trademark of PCC. For more knowledge regarding organosilanes, you may visit www.SiSiB.com or www.PCC.asia



SiSiB[®] OF6050 FLUID

- 2 -

PACKING AND STORAGE

SiSiB[®] OF6050 fluid is supplied in 200Kg steel drum.

In the original unopened packaging, SiSiB[®] OF6050 fluid has a shelf life of 18 months in a dry and cool place.

NOTES

All information in the leaflet is based on our present knowledge and experience. We reserve the right to make any changes according to technological progress or further developments. Performance of the product described herein should be verified by testing.

We specifically disclaim any other express or implied warranty of fitness for a particular purpose or merchantability. We disclaim liability for any incidental or consequential damages.

Please send all technical questions concerning quality and product safety to: support@SiSiB.com.

Power Chemical
ISO9001 ISO14001 certificated

Copyright© 2008 Power Chemical Corporation Ltd.
SiSiB[®] is a registered trademark of PCC. For more knowledge regarding organosilanes, you may visit www.SiSiB.com or www.PCC.asia